

TRANSFORMERS

620 TRANSFORMERS

620 Series Transformers are available in a wide variety of models from universal enclosed to single voltage open frame models. All models are class II, UL 1585, component recognized by Underwriters Laboratories Inc. Refer to the ordering chart to select a transformer to meet your needs.


- UL approved 1585 Class II
- Meets applicable NEMA standards
- Thermal fuse protection




File No. E110657
File No. E92807
File No. E99697



File No. LR107325-1

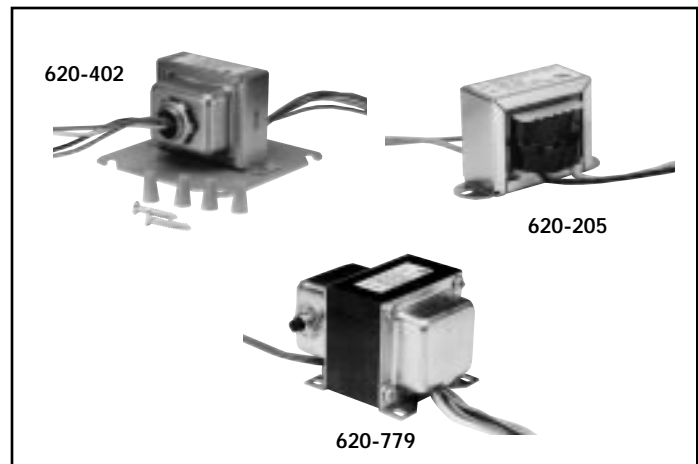


ORDERING DATA

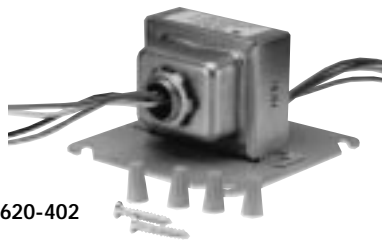

620-402

UNI-LINE ORDER NUMBER	RATING (VA)	PRIMARY		SECONDARY	
		VOLTAGE (50/60 HZ)	LEAD LENGTH	VOLTAGE (50/60 HZ)	LEAD LENGTH
UNIVERSAL MOUNTING MODELS – FOOT, 4X4 PLATE OR HUB MOUNT					
620-402	48*	120/208/240	8"	★	8"
620-403	40	120		24	
620-404		208/240		28	
620-501†	50	120/208/240		24	SCREW TERMINALS
620-502		120/208/240		24	8"
620-503		75		120/208/240/408	24

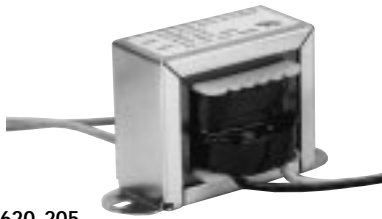


620-205

FOOT-MOUNTED MODELS

620-150†	50	120/208/240	8"	28	SCREW TERMINALS
620-205	20	120		24	8"
620-206✓		208/240			
620-405	40	120			
620-406		208/240			
620-482		120/208/240			

MANUAL RESET

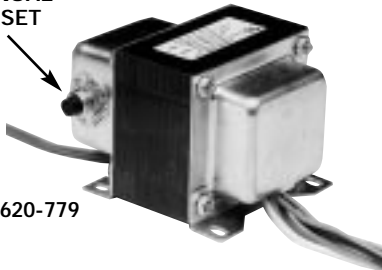

620-779

75 VA FOOT-MOUNTED MODELS

620-752†	75	120/208/240	8"	24	8"
620-758†		480			
620-775•		120/208/240/480			
620-779■					

PLUG-IN MODEL

620-202	20	120	PLUG-IN	24	SCREW TERMINALS
---------	----	-----	---------	----	-----------------

- * Combined total output of all 3 secondaries.
- † Fuse protected, internally.
- ★ 2.5, 12, 24 or a combination of 2.5 & 24 or 12 & 24.
- Fuse protected externally. Has external fuse holder.
- Has manual reset circuit breaker on secondary.
- ✓ Obsolete – available to stock on hand.

620-202

